

Selector Switches (Lever Operator)


Package Quantity: 1

Shape	Lever Operator ASS□L																
	Contact Code	Contact Block		Operator Position			Maintained	Spring Return from Right	Spring Return from Left								
		Mounting Position	Contact	1	2		1 2	1 2	Contact Block		Operator Position		1 2				
									Mounting Position	Contact	1	2					
90° 2-position	1NO (10)	①	NO		●		ASS2L10N	ASS21L10N	①	NO	●		ASS22L10N				
		②	—	Dummy Block										②	—	—	
	1NO-1NC (11)	①	NO		●		ASS2L11N	ASS21L11N	①	NO	●		ASS22L11N				
		②	NC	●										②	NC	●	●
	2NO (20)	①	NO			●	ASS2L20N	ASS21L20N	①	NO	●		ASS22L20N				
		②	NO			●								②	NO	●	
	2NO-2NC (22)	①	NO			●	ASS2L22N	ASS21L22N	①	NO	●		ASS22L22N				
		②	NC	●										②	NC		●
		③	NO			●								③	NO	●	
	2R ☆	①	EM	—			ASS2L2RN-118 ☆	ASS21L2RN-118 ☆	①								
②		LB	—			②											
2R ☆	①					—	—	①	LB		—	ASS22L2RN-169 ☆					
	②												②	EM	—		
45° 3-position	2NO (20)	①	NO	●			ASS3L20N	ASS31L20N	ASS32L20N	ASS33L20N							
		②	NO			●											
	2NC (02)	①	NC			—	ASS3L02N	ASS31L02N	ASS32L02N	ASS33L02N							
		②	NC	—	—	—											
	2NO-2NC (22)	①	NO	●			ASS3L22N	ASS31L22N	ASS32L22N	ASS33L22N							
		②	NO			●											
		③	NC			—											
	4NO (40)	①	NO	●			ASS3L40N	ASS31L40N	ASS32L40N	ASS33L40N							
		②	NO			●											
		③	NO	●													
		④	NO			●											
	4NC (04)	①	NC			—	ASS3L04N	ASS31L04N	ASS32L04N	ASS33L04N							
		②	NC	—	—	—											
		③	NC	—	—	—											
④		NC	—	—	—												
3S ☆	①	NO	●			ASS3L3SN-243 ☆	—	—	—								
	②	NO			●												
	③	NC			●												
	④	—	Dummy Block														

- Knob operator: white indicator on black body
- Round bezel (metal): Chrome-plated
- See page 21 to 23 for other contact arrangements.
- Selector switches with one or three contact blocks contain a dummy block.
- Spring return is not available with contact code 3S.


- On the contact arrangement marked with ☆ in the table above, the rated current (load switching current) is reduced to a half of the related current of the contact block. The rated insulation voltage and the rated thermal current remain unchanged.
- See page 7 for gold-plated silver contacts.
- Turn the operator to each position accurately.

Contact Block Mounting Position

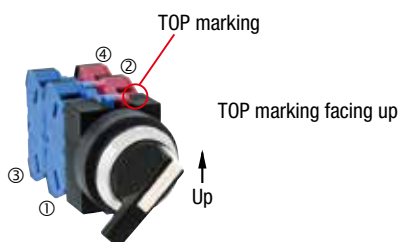

Dimensions

All dimensions in mm.

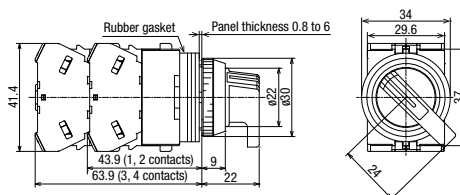

Terminal screw: M3.5
Integrated terminal cover

• See page 11 for bottom view.