

ASD Selector Switches (Knob Operator)


Package Quantity: 1

| Shape | Knob Operator ASD | | | | | | | | | | | |
|-------------------|-----------------------|---------------|----|-------------------|-------------------|-------------|--------------------------|-------------------------|----------|-------------------|----------|----------|
| | Contact Configuration | | | | | Maintained | Spring Return from Right | Spring Return from Left | | | | |
| | Contact | Contact Block | | Operator Position | | 1 2 | 1 2 | Contact Block | | Operator Position | | 1 2 |
| Mounting Position | | Contact | 1 | 2 | Mounting Position | | | Contact | 1 | 2 | | |
| 90° 2-position | 1NO (10) | ① | NO | | ● | ASD210N | ASD2110N | ① | NO | ● | | ASD2210N |
| | | ② | — | Dummy Block | | | | ② | — | — | | |
| | 1NO-1NC (11) | ① | NO | | ● | ASD211N | ASD2111N | ① | NO | ● | | ASD2211N |
| | | ② | NC | ● | | | | ② | NC | ● | ● | |
| | 2NO (20) | ① | NO | | ● | ASD220N | ASD2120N | ① | NO | ● | | ASD2220N |
| | | ② | NO | | ● | | | ② | NO | ● | | |
| | 2NO-2NC (22) | ① | NO | | ● | ASD222N | ASD2122N | ① | NO | ● | | ASD2222N |
| | | ② | NC | ● | | | | ② | NC | | ● | |
| | | ③ | NO | | ● | | | ③ | NO | ● | | |
| | | ④ | NC | ● | | | | ④ | NC | | ● | |
| | 45° 3-position | 2NO (20) | ① | NO | ● | | ASD320N | ASD3120N | ASD3220N | | | ASD3320N |
| | | | ② | NO | | ● | | | ASD3220N | | | |
| 2NC (02) | | ① | NC | | ● | ASD302N | ASD3102N | ASD3202N | | | ASD3302N | |
| | | ② | NC | ● | | | | ASD3202N | | | | |
| 2NO-2NC (22) | | ① | NO | ● | | ASD322N | ASD3122N | ASD3222N | | | ASD3322N | |
| | | ② | NO | | ● | | | ASD3222N | | | | |
| | | ③ | NC | | ● | | | ASD3222N | | | | |
| | | ④ | NC | ● | | | | ASD3222N | | | | |
| 4NO (40) | | ① | NO | ● | | ASD340N | ASD3140N | ASD3240N | | | ASD3340N | |
| | | ② | NO | | ● | | | ASD3240N | | | | |
| | | ③ | NO | ● | | | | ASD3240N | | | | |
| | | ④ | NO | | ● | | | ASD3240N | | | | |
| 4NC (04) | | ① | NC | | ● | ASD304N | ASD3104N | ASD3204N | | | ASD3304N | |
| | | ② | NC | ● | | | | ASD3204N | | | | |
| | | ③ | NC | | ● | | | ASD3204N | | | | |
| | | ④ | NC | ● | | | | ASD3204N | | | | |
| ☆ 3S | | ① | NO | ● | | ASD33SN-243 | — | — | | | — | |
| | | ② | NO | | ● | | | — | | | | |
| | | ③ | NC | | ● | | | — | | | | |
| | | ④ | — | Dummy Block | | | | — | | | | |


- Knob: Black
- Round bezel (metal): Chrome-plated
- Selector switches with 1 or 3 contact blocks have a dummy block.
- Knob operator can be installed at every 45 degrees intervals in addition to the positions shown in the above table.
- See B-321 to B-322 for other contact configurations.

- Turn the operator to each position accurately.
- Selector switches with ☆ have a half contact operating current (load switching current value). Rated insulation voltage and rated current remain the same.
- See B-308 for gold-plated silver contacts.
- See B-312 for bottom view.

Contact Block Mounting Position



Dimensions

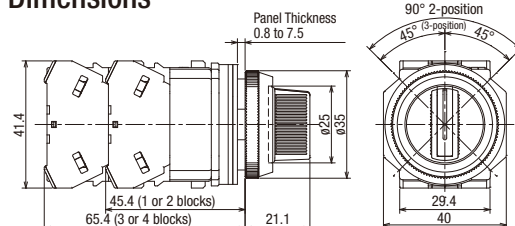

All dimensions in mm.

Terminal Screws: M3.5 Terminal cover: integrated