
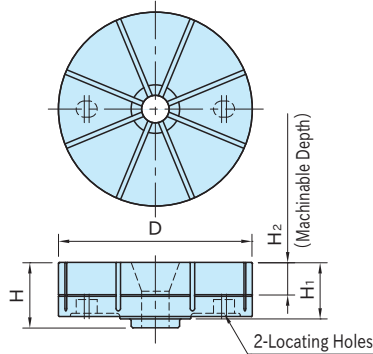


CP127

JAWS FOR INTERNAL FORM HOLDING



Jaw
A7075 Aluminum
Silver


Part Number	D	H ₁	H ₂	H	Weight (kg)	Proper	Proper
						CP125 Clamps	CP127-B Screws
CP127-06501	65	25	10	28.5	0.2	CP125-06501	CP127-06501B
CP127-09001	90	30	15	34.5	0.4	CP125-09001	CP127-09001B
CP127-12001	120	35	20	40.5	0.9	CP125-12001	CP127-12001B
CP127-16001	160	40	25	46.5	1.9	CP125-16001	CP127-16001B

Furnished Part

1 pc. of O-ring

CP127-B



TAPERED SCREWS FOR INTERNAL FORM HOLDING



Body
SCM435 Steel
Quenched and tempered
Electroless nickel plated

Part Number	D	L	M	L ₁	D ₁	W	Weight (g)	Proper CP127 Jaws
CP127-06501B	22.5	29	M 8×1.25	10	13.2	6	50	CP127-06501
CP127-09001B	27	35	M10×1.5	11	16	8	80	CP127-09001
CP127-12001B	29	41		13			100	CP127-12001
CP127-16001B	33	47	M12×1.75	14	18	10	150	CP127-16001

Features



- The tapered screw expands the jaws towards eight directions to hold different irregularly-shaped parts securely.
- 0.15mm clamping stroke of each jaw section is perfect for clamping of lost-wax parts, die-cast parts, extruded parts, solid-drawn parts, prefinished parts, etc.

- ① When the cam cylinder is tightened, the tapered screw is pulled down.
- ② At the same time the 8 jaw sections expand to clamp the internal form of a part.

