

AT1



ジュンロン® AT1 (軟質ナイロンコイルチューブ)

標準在庫品

JUNRON® AT1 (Flexible nylon coil tube)

Standard stock products

Junron A-AT

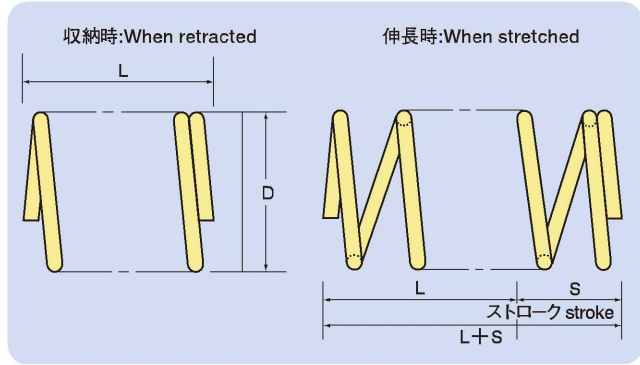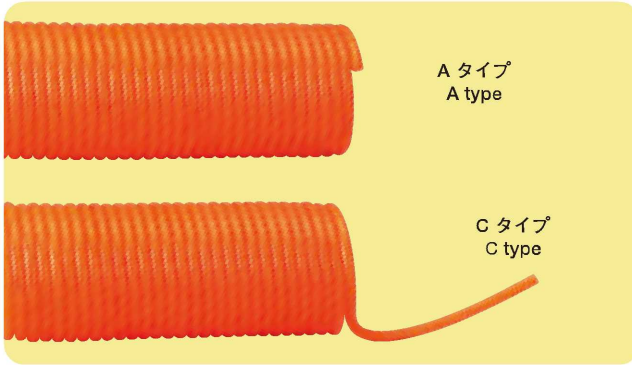

部品番号 PART NO.	チューブ寸法 / TUBE SIZE 外径×内径×長さ O.D. × I.D. × LENGTH (mm) (mm) (m)	最大使用長 MAX. WORKING LENGTH L+S (m)	チューブ破壊圧力 TUBE BURST PRESSURE 23°C (MPa)	最高使用圧力 MAX. WORKING PRESSURE 23°C (MPa)	コイル寸法 COIL DIMENSIONS		
					L (mm)	S (m)	D (mm)
AT1-06-7.5	7.6× 6× 7.5	6	5.0	<1.2	230	5.7	95
AT1-06-10	7.6× 6×10.0	8	5.0	<1.2	310	7.6	95
AT1-06-15	7.6× 6×15.0	12	5.0	<1.2	460	11.5	95
AT1-06-20	7.6× 6×20.0	16	5.0	<1.2	620	15.3	95
AT1-09-7.5	11 × 9× 7.5	5	4.3	<1.0	290	4.7	115
AT1-09-10	11 × 9×10.0	7	4.3	<1.0	380	6.6	115
AT1-09-15	11 × 9×15.0	10	4.3	<1.0	560	9.4	115
AT1-09-20	11 × 9×20.0	14	4.3	<1.0	760	13.2	115
AT1-12-7.5	15 ×12× 7.5	4	4.8	<1.1	260	3.7	155
AT1-12-10	15 ×12×10.0	6	4.8	<1.1	350	5.6	155
AT1-12-15	15 ×12×15.0	8	4.8	<1.1	530	7.4	155
AT1-12-20	15 ×12×20.0	12	4.8	<1.1	700	11.2	155

- 標準色：橙/Standard color : orange
- CタイプはAT1-06-7.5、AT1-09-7.5のみ標準在庫です。又、両端チューブツノ長さは100mmです。/For the type C, only AT1-06-7.5 and AT1-09-7.5 are standard stock products. The tube horns length of type C are 100mm.
- Cタイプの場合、上記部品番号末尾にCを追記下さい。
When order type C, please add "C" to the end of part number of the above.


AT1コイル用継手 AT1 Coil Fitting

標準在庫品


Standard stock products




M (メス・ニップル) M (Female connector)



部品番号 PART NO.	適用チューブ寸法 TUBE SIZE TO BE USED 外径×内径 O.D. (mm) × I.D. (mm)	Rc (PT)	φd	L1	L2	L3	六角対辺 HEX.		重量 WEIGHT (g)	有効断面積 EFFECTIVE SECTIONAL AREA (mm²)
							S1	S2		
M- 6-PT1/4	7.6× 6	1/4	5.0	13	31	115	16	14	38	15
M- 9-PT3/8	11 × 9	3/8	7.5	15	37	128	19	19	71	36
M-12-PT1/2	15 ×12	1/2	10.5	17	43	148	25	23	123	89



O (オス・ニップル) O (Male connector)



部品番号 PART NO.	適用チューブ寸法 TUBE SIZE TO BE USED 外径×内径 O.D. (mm) × I.D. (mm)	R (PT)	φd	L1	L2	L3	六角対辺 HEX.		重量 WEIGHT (g)	有効断面積 EFFECTIVE SECTIONAL AREA (mm²)
							S1	S2		
O- 6-PT1/8	7.6× 6	1/8	5.0	7.5	31	115	12	14	33	14
O- 6-PT1/4	7.6× 6	1/4	5.0	10.5	35	118	14	14	38	17
O- 9-PT3/8	11 × 9	3/8	7.5	12.0	41	130	17	19	77	43
O-12-PT1/2	15 ×12	1/2	10.5	15.0	49	155	22	23	124	101