



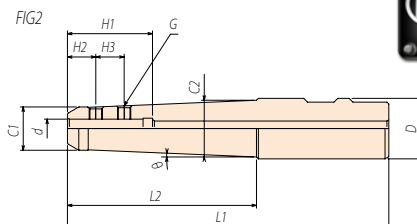

ST エクステンションサイドロックホルダ

EXTENSION SIDE LOCK HOLDER

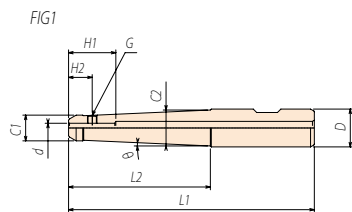

ST20

CODE	FIG	D	φ d	L2	L1	C1	C2	θ	H1	H2	G
ST20-SLM4 - 50	1	20	4	50	105	12.6	18	3° 21'	20	10	M4
- 75				75	130			2° 13'			
-SLM6 - 50			6	50	105	17.8	19	0° 46'	30	15	M6
- 75				75	130			0° 30'			
-100			8	50	105	20	20	0° 22'	40	17	M6
-SLM8 - 50				75	130			-			
- 75		100	155	-	-						
-100		100	155	-	-						

ST32

CODE	FIG	D	φ d	L2	L1	C1	C2	θ	H1	H2	H3	G
ST32-SLM6 - 50	1	20	6	50	120	17.8	24.1	4°	30	15	-	M6
-100				100	170		31	4°				
-150			8	150	220	19.8	30	2° 25'	34	17	-	M6
-200				200	270		31	1° 56'				
-SLM8 - 50			10	50	120	22.9	26.1	4°	45	15	15	M6
-100				100	170		30	3° 5'				
-150		12	150	220	24.9	30	2° 1'	50	15	15	M8	
-200			200	270		30	1° 30'					
-SLM10 - 50		16	50	120	32	29	4°	55	15	18	M8	
-100			100	170		30	2° 10'					
-150		12	150	220	24.9	30	1° 34'	50	15	15	M8	
-200			200	270		31	1° 1'					
-SLM12 - 50	16	50	120	32	29.5	3°	55	15	18	M8		
-100		100	170		30	1° 34'						
-150	12	150	220	24.9	30	1° 1'	50	15	15	M8		
-200		200	270		31	0° 54'						
-SLM16 - 50	16	50	120	32	32	-	55	15	18	M8		
-100		100	170		-	-						
-150	12	150	220	24.9	32	-	55	15	18	M8		
-200		200	270		-	-						

ST42

CODE	FIG	D	φ d	L2	L1	C1	C2	θ	H1	H2	H3	G
ST42-SLM6 - 50	1	20	6	50	140	17.8	24.1	4°	30	15	-	M6
-100				100	190		31.1					
-150			8	150	240	19.8	38	3° 16'	34	17	-	M6
-200				200	290		40					
SLM8 - 50			10	50	140	22.9	26.1	4°	45	15	15	M6
-100				100	190		33.1	4°				
-150		12	150	240	24.9	40	2° 58'	50	15	15	M8	
-200			200	290		40	3°					
SLM10 - 50		16	50	140	32.4	29	4°	55	15	18	M8	
-100			100	190		36	4°					
-150		12	150	240	24.9	40	3° 24'	55	15	18	M8	
-200			200	290		40	2° 23'					
SLM12 - 50	16	50	140	32.4	31	4°	55	15	18	M8		
-100		100	190		38	3°						
-150	12	150	240	24.9	40	2° 14'	55	15	18	M8		
-200		200	290		40	2° 14'						
SLM16 - 50	20	50	140	36.4	38.1	4°	58	18	18	M8		
-100		100	190		40	2° 24'						
-150	12	150	240	24.9	40	1° 33'	58	18	18	M8		
-200		200	290		40	1° 9'						
SLM20 - 50	20	50	140	36.4	40	2° 31'	58	18	18	M8		
-100		100	190		40	1° 8'						
-150	12	150	240	24.9	40	0° 44'	58	18	18	M8		
-200		200	290		40	0° 44'						

■特殊サイズも注文により製作いたします。 Special size is available upon request.