


# CoroMill® 365 insert for milling

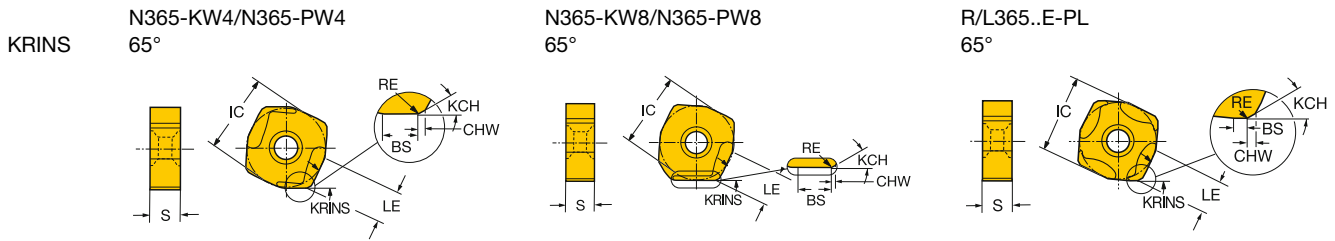

|        | RE | KCH  | CHW | BS   | Ordering code | P                 |      | K    |      |      |      | S    |      | H    |      | Dimensions, mm, inch |      |      |      |
|--------|----|------|-----|------|---------------|-------------------|------|------|------|------|------|------|------|------|------|----------------------|------|------|------|
|        |    |      |     |      |               | 1030              | 4220 | 1020 | 3330 | 4220 | K20D | K20W | 1010 | 1010 | 4220 | IC                   | LE   | S    |      |
| Light  | 15 | 0.3  | 35° | 0.7  | 1.5           | R365-1505ZNE-PL   | ☆    | ☆    | ☆    |      |      |      |      |      |      |                      | 15.0 | 6.4  | 5.66 |
|        |    | .012 |     | .028 | .059          |                   |      |      |      |      |      |      |      |      |      |                      | .591 | .252 | .223 |
|        | 15 | 0.3  | 35° | 0.7  | 1.5           | R/L365-1505ZNE-KL |      |      | ☆    | ☆    |      |      |      |      |      |                      | 15.0 | 6.4  | 5.66 |
|        |    | .012 |     | .028 | .059          |                   |      |      |      |      |      |      |      |      |      |                      | .591 | .252 | .223 |
| Medium | 15 | 0.3  | 35° | 0.7  | 1.5           | R365-1505ZNE-PM   | ☆    | ☆    | ☆    |      |      |      |      |      |      |                      | 15.0 | 6.4  | 5.66 |
|        |    | .012 |     | .028 | .059          |                   |      |      |      |      |      |      |      |      |      |                      | .591 | .252 | .223 |
|        | 15 | 0.3  | 30° | 0.7  | 1.5           | R/L365-1505ZNE-KM |      |      | ☆    | ☆    |      |      |      |      |      |                      | 15.0 | 6.4  | 5.66 |
|        |    | .012 |     | .026 | .059          |                   |      |      |      |      |      |      |      |      |      |                      | .591 | .252 | .223 |

|       | RE | KCH  | CHW | BS   | Ordering code | P                |      | K    |      |      |    | Dimensions, mm, inch |      |      |      |
|-------|----|------|-----|------|---------------|------------------|------|------|------|------|----|----------------------|------|------|------|
|       |    |      |     |      |               | 1030             | 1020 | 3220 | 3330 | K20W | IC | LE                   | S    |      |      |
| Light | 15 | 0.6  | 35° | 0.8  | 4.0           | N365-1505ZNE-PW4 | ☆    |      |      |      |    |                      | 15.0 | 6.4  | 5.66 |
|       |    | .022 |     | .030 | .157          |                  |      |      |      |      |    |                      | .591 | .252 | .223 |
|       | 15 | 0.6  | 35° | 0.8  | 4.0           | N365-1505ZNE-KW4 |      | ☆    | ☆    | ☆    | ☆  |                      | 15.0 | 6.4  | 5.66 |
|       |    | .022 |     | .030 | .157          |                  |      |      |      |      |    |                      | .591 | .252 | .223 |
| Light | 15 | 0.2  | 35° | 0.8  | 8.0           | N365-1505ZNE-PW8 | ☆    |      |      |      |    |                      | 15.0 | 6.4  | 5.66 |
|       |    | .008 |     | .030 | .315          |                  |      |      |      |      |    |                      | .591 | .252 | .223 |
|       | 15 | 0.2  | 35° | 0.8  | 8.0           | N365-1505ZNE-KW8 |      | ☆    | ☆    | ☆    | ☆  |                      | 15.0 | 6.4  | 5.66 |
|       |    | .008 |     | .030 | .315          |                  |      |      |      |      |    |                      | .591 | .252 | .223 |

J474
 GC
 J508
 ISO 13399
 Q1
 C3 - DC
 Q17

