Shaft Supports L-Shaped (Machined)

Side Slit / Split

Features: Suitable when crosswise space is limited. Side Slit Type allows each screw to be fixed from above. Split Type facilitates maintenance.

Side Slit

RoHS10

Height H Selectable Type	Height H Configurable Type	M Material	S Surface Treatment	A Accessory
SHKWB	SHKWBH	S45C Equivalent	Black Oxide	Hex Socket Head Cap Screw 1 pc.
SHKWM	SHKWMH		Electroless Nickel Plating	Hex Socket Head Cap Screw 1 pc. (SUS)
SHKWS	SHKWSH	SUS304	-	
SHKWA	SHKWAH	Aluminum Alloy	Clear Anodize	
SHKWD	-		Black Anodize	Hex Socket Head Cap Screw 1 pc.

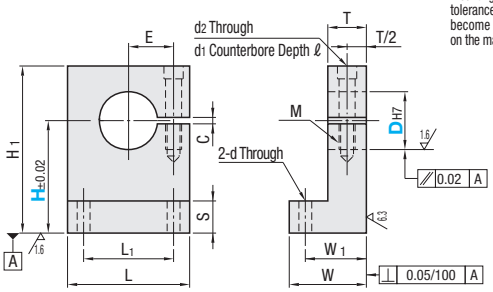

Slit is machined after the mounting hole D is bored to H7 tolerance. The tolerance may become H8 or so depending on the machining condition.

Pilot hole for tapped hole M may be through.

Part Number Type	D	H Height H Selectable Type	H Height H Configurable Type 0.1mm Increment	L	H1	T	S	W	W1	L1	d	E	Tightening Screw M	d2	d1	ℓ	C	Unit Price Height H Selectable Type SHKWB	SHKWM	SHKWS	SHKWA	SHKWD	Height H Configurable Type SHKWBH	SHKWMH	SHKWSH	SHKWAH
Height H Selectable Type SHKWB SHKWM SHKWS SHKWA SHKWD	8	15 20 25 30 40	15.0~40.0	32	H+8	10	6	22	16	22	4.5	11	M4 Depth 8	4.5	8	4.5	2									
	10	20 25 30	20.0~30.0		H+9																					
	12	20 25 30	20.0~30.0		H+10																					
	13	20 25 30	20.0~30.0	38	H+11					28		13														
	16	20 25 30 40	20.0~40.0		H+13							14														
Height H Configurable Type SHKWBH SHKWMH SHKWSH SHKWAH	20	25 30 40 50 60	25.0~60.0	50	H+15	16	8	32	24	36	6.5	17	M6 Depth 12	6.6	11	6.5										
	25	30 40 50 60	30.0~60.0		H+18							18														
	30	30 40 50 60	30.0~60.0	73	H+21	20	10	38	29	55	9	26	M8 Depth 16	9	14	9	3									
	35	40 50 60	40.0~60.0		H+24																					
	40	40 50 60 80	40.0~80.0		H+27							27														

Split

RoHS10

Height H Selectable Type	Height H Configurable Type	M Material	S Surface Treatment	A Accessory
SHKPB	SHKPBH	S45C Equivalent	Black Oxide	Hex Socket Head Cap Screw 2 pcs.
SHKPM	SHKPMH		Electroless Nickel Plating	Hex Socket Head Cap Screw 2 pcs. (SUS)
SHKPS	SHKPSH	SUS304	-	
SHKPA	SHKPAH	Aluminum Alloy	Clear Anodize	
SHKPD	-		Black Anodize	Hex Socket Head Cap Screw 2 pcs.

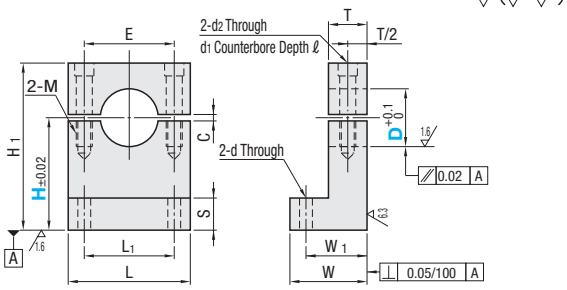

Pilot hole for tapped hole M may be through.

Part Number Type	D	H Height H Selectable Type	H Height H Configurable Type 0.1mm Increment	L	H1	T	S	W	W1	L1	d	E	Tightening Screw M	d2	d1	ℓ	C	Unit Price Height H Selectable Type SHKPB	SHKPM	SHKPS	SHKPA	SHKPD	Height H Configurable Type SHKPBH	SHKPMH	SHKPSH	SHKPAH
Height H Selectable Type SHKPB SHKPM SHKPS SHKPA SHKPD	3	10 15 20	10.0~20.0	22	H+6	8	4	16	12	13	3.5	13	M3 Depth 6	3.5	6.5	3.5	1.5									
	4	10 15 20	10.0~20.0																							
	5	15 20 25	15.0~25.0		H+7																					
	6	15 20 25	15.0~25.0																							
	8	15 20 25 30 40	15.0~40.0	30	H+10	10	6	20	15	20	4.5	20	M4 Depth 8	4.5	8	4.5	2									
	10	20 25 30	20.0~30.0	38						26		26														
	12	20 25 30	20.0~30.0																							
	13	20 25 30	20.0~30.0																							
	16	20 25 30 40	20.0~40.0		H+12																					
Height H Configurable Type SHKPBH SHKPMH SHKPSH SHKPAH	20	25 30 40 50 60	25.0~60.0	50	H+17	16	8	32	24	36	6.6	36	M6 Depth 12	6.6	11	6.5										
	25	30 40 50 60	30.0~60.0		H+20																					
	30	30 40 50 60	30.0~60.0	70	H+30	20	10	40	30	48	9	48	M8 Depth 16	9	14	9	3									
	35	40 50 60	40.0~60.0																							
	40	40 50 60 80	40.0~80.0	76						56		56														
	50	50 60 80	50.0~80.0	100	H+40	25	15	50	38	76	14	76	M12 Depth 24	14	20	13										

Ordering Example

Part Number	-	H
SHKWS20	-	30
SHKPSH20	-	30.6

Example

Combination of these app. examples can be selected on the Web.
Details about Selection Procedure P.87



e-Catalog Search Keyword
#MA822 Search
* Enter the search keyword in the search box on e-Catalog. The search result will be shown in "Modular Assembler" area.