


Shaft Supports Bottom Mount Slit (Machined)

Standard / Wide



Type	Material	Surface Treatment	Accessory
SHSBB	S45C	Black Oxide	Hex Socket Head Cap Screw 1 pc.
SHSBM	Equivalent	Electroless Nickel Plating	Hex Socket Head Cap Screw 1 pc. (SUS)
SHSBS	SUS304	-	
SHSBA	Aluminum Alloy	Clear Anodize	Hex Socket Head Cap Screw 1 pc.
SHSBK		Black Anodize	

Slit is machined after the mounting hole D is bored to H_z tolerance. The tolerance may become H_s or so depending on the machining condition.

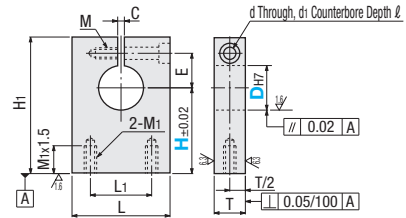

Part Number Type	D	H Selection				L	H ₁	T	L ₁	E	Tightening Screw M	M ₁	d	d ₁	l	C	Unit Price											
		SHSBB	SHSBM	SHSBS	SHSBA												SHSBK											
SHSBB SHSBM SHSBS SHSBA SHSBK	8	15	20	25	30	16	H+16	12	14	13	M4 Depth 8	4	4.5	8	4.5	2												
	10	20	25	30																								
	12	20	25	30																								
	13	20	25	30																								
	15	25	30	40		25	H+20		16	15							15	15	6	6.6	11	6.5	3					
	16	25	30	40																								
	18	25	30	40	50	32	H+26	16	18	18	M6 Depth 12	6	6.6	11	6.5	3												
	20	25	30	40	50																							
	25	30	40	50		38	H+28	(15)	24	21	M8 Depth 16	8	9	14	9	3												
	30	30	40	50	60																							
	35	40	50	60		50	H+36	(20)	32	27	M8 Depth 16	8	9	14	9	3												
	40	40	50	60																								


Values in () are the T dimensions of SHSBA and SHSBK (Aluminum).



Type	Material	Surface Treatment	Accessory
SHSBBN	S45C	Black Oxide	Hex Socket Head Cap Screw 1 pc.
SHSBMN	Equivalent	Electroless Nickel Plating	Hex Socket Head Cap Screw 1 pc. (SUS)
SHSBSN	SUS304	-	

D dimensions 30 ~ 40 come with 2 screws.

Slit is machined after the mounting hole D is bored to H_z tolerance. The tolerance may become H_s or so depending on the machining condition.

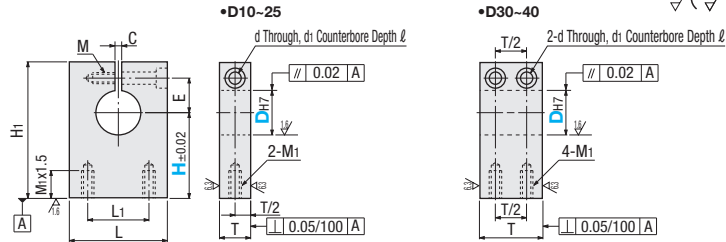

Part Number Type	D	H Selection				L	H ₁	T	L ₁	E	Tightening Screw M	M ₁	d	d ₁	l	C	Unit Price								
		SHSBBN	SHSBMN	SHSBSN																					
SHSBBN SHSBMN SHSBSN	10	20	25	30	22	H+19	18	12	11	M6 Through	M6	6.6	11	6.5	2										
	12	20	25	30																					
	16	25	30	40	25	H+20		20	14							13	13	M8 Depth 16	M8	9	14	9			
	20	25	30	40																			50		
	25	30	40	50	38	H+28		30	24							19	19	M8 Depth 16	M8	9	14	9			
	30	30	40	50																			60		
	35	40	50	60	50	H+36	35	32	27	27	M8 Depth 16	M8	9	14	9										
	40	40	50	60																					

Ordering Example: Part Number - H
SHSBS20 - 30
SHSBMN30 - 30



Alterations

Part Number - HC
SHSBS20 - HC41.5

Alterations are not available for Stocked Items - Wide Type. Express Service is not available.

Alteration	Code	Spec.
Mounting Height	HC	Changes shaft mounting height. Change H to HC to specify height. Specify HC in 0.1mm increments. Specifiable Range Hmin.<HC<Hmax. Ordering Code HC35.6