




RoHS10

Type	M Material	S Surface Treatment
LXCB	S45C	Black Oxide
PLXCB	Equivalent	Electroless Nickel Plating
SLXCB	SUS304	-

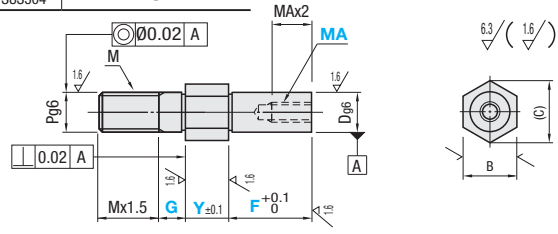

Please refer to Table 1 to specify dimensions Y and F.

Part Number Type	No.	Dg6	1mm Increment			MA (Coarse) Selection	Pg6	M (Coarse)	B	(C)	Unit Price		
			Y	F	G						LXCB	PLXCB	SLXCB
LXCB PLXCB SLXCB	6	6	2-60	5-100	5-10	3	6	M 6	8	9.2			
	8	8				4	8	M 8	10	11.5			
	10	10				4 5 6	10	M10	13	15			
	12	12				5 6 8	12	M12	14	16.2			
	13	13				5-15			17	19.6			
	15	15	6 8 10	19	21.9								
	16	16	4-60	10-150	5-20	6 8 10 12	20	M20	24	27.7			
	17	17				6 8 10 12	16	M16					
	18	18				8 10 12 16	20	M20					
	20	20				8 10 12 16	16	M16					
	20A	20				8 10 12 16	20	M20					
	22	22				8 10 12 16	16	M16					
	22A	22				8 10 12 16	20	M20					
	25	25				8 10 12 16	16	M16					
	25A	25				8 10 12 16	20	M20					
30	30	8 10 12 16 20				20	M20	32	36.9				
30A	30	8 10 12 16 20	16	M16									

**Table 1**

MA	Y+F
M 3	Y+F≥11.5
M 4	Y+F≥14.0
M 5	Y+F≥16.2
M 6	Y+F≥18.5
M 8	Y+F≥23.5
M10	Y+F≥28.5
M12	Y+F≥35.5
M16	Y+F≥45.0
M20	Y+F≥55.0

Ordering Example

Part Number - Y - F - G - N - MA

FXC B8 - 15 - F25 - G5 - MA4

PFXNC B10 - 27 - F10 - G5 - N10 - MA5

Alterations

Part Number - Y - F - G - N - MA - (YKC, WSC)

FXC B15 - 10 - F21 - G7 - MA6 - WSC

	Y Dimension Tolerance	Four Wrench Flats
Alterations		
Code	YKC	WSC
Spec.	Changes Y dimension tolerance to ±0.05. Applicable to all types. Ordering Code YKC	Changes from two wrench flats to four wrench flats. Applicable to Standard and Stepped Types. Ordering Code WSC

