


Tabbed Brackets - For 1 Slot

For 5 Series (Slot Width 6mm) Aluminum Extrusions



Features: Tabbed Brackets to be connected by both L and Cross-Connections.

Tabbed Reversal Brackets




Type	M Material	S Surface Treatment	
① HBLFSNF5	ADC12	Black Anodize	
② HBLFSN5			
③ HBLFSN5-4			
④ HBLFSNB5			Electroless Nickel Plating
⑤ HBLFSNM5			Baked Paint (Silver)
⑥ CHBLFSN5			

*Baked Paint (Silver) is color coordinated with Clear Coating Extrusions.

• Tabbed Reversal Brackets (Depth 20mm)

HBLFSNF5

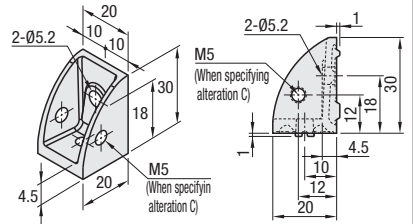

• Tabbed Reversal Brackets

HBLFSN5

(For M4 Screw)

HBLFSNB5


(Black Anodize)

HBLFSNM5

(Electroless Nickel Plating)

CHBLFSN5

(Baked Paint, Silver)

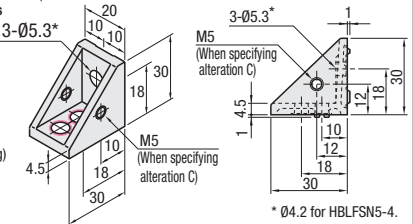

* Ø4.2 for HBLFSN5-4.

Part Number	Mass (g)	Applicable Screw	T Nut	Allowable Load (N)	Unit Price (1-99 pcs)	Volume Discount Rate (100-200)
HBLFSNF5	13	CBM5-10	HNTT5-5	2	1176	
HBLFSN5	15	CBM4-10	HNTT5-4			
HBLFSN5-4 (For M4 Screw)		2	HNTT5-5			
HBLFSNB5* (Black Anodize)						
HBLFSNM5 (Electroless Nickel Plating)						
CHBLFSN5 (Baked Paint, Silver)						

* For repairing black anodizing, refer to P.846.


Features: One-Sided Tabbed Rib Brackets. Easy to work with wrenches.

One-Sided Rib Brackets



HBLFSL5
HBLFSLB5
(Cathodic Electrodeposition Paint: Black)
HBLFSLM5
(Electroless Nickel Plating)


Type	M Material	S Surface Treatment
HBLFSL5	ADC12	Cathodic Electrodeposition Coating: Black
HBLFSLB5		
HBLFSLM5		

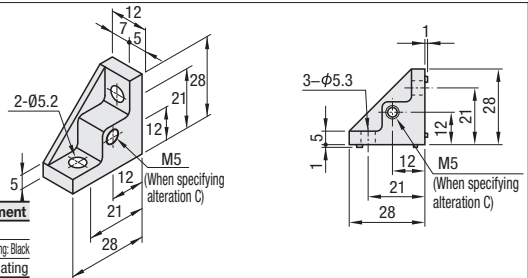

Part Number	Mass (g)	Applicable Screw	T Nut	Allowable Load (N)	Unit Price (1-99 pcs)	Volume Discount Rate (100-200)
HBLFSL5	13	CBM5-10	HNTT5-5	2	1176	
HBLFSLB5 (Cathodic Electrodeposition Paint: Black)						
HBLFSLM5 (Electroless Nickel Plating)						

Example

Can be combined with both cover plates of 5mm and 3mm thickness.



There are protrusions to be inserted into slots. (Protrusion Dimension 1mm)
HFS5-2020

Features: Pressing nuts against the long tabs makes cumbersome hole positioning unnecessary.


Nut Mounting Brackets



HBLFSR5

- Slotted holes are for various nut hole positions.
- Bracket tabs may be damaged when nuts are fallen on them.
- Use of washers are recommended. (Refer to alterations on the next page: SEC)

M Material: ADC12

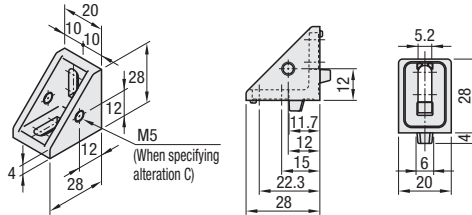

Part Number	Mass (g)	Applicable Screw	T Nut	Allowable Load (N)	Unit Price (1-99 pcs)	Volume Discount Rate (100-200)
HBLFSR5	15	CBM5-10	HNTT5-5	2	1176	

Example

When nuts are wedged through until the tab, hole positions of bracket and nuts are aligned and fine adjustment becomes unnecessary.
⊗ Short Nuts, HNTM and HNTAM are not applicable.

