



Manifold Blocks - Hydraulic / Pneumatic

T-Shaped Hole



For details of recommended tapered male thread tightening torque and through pilot hole, see P.1224.

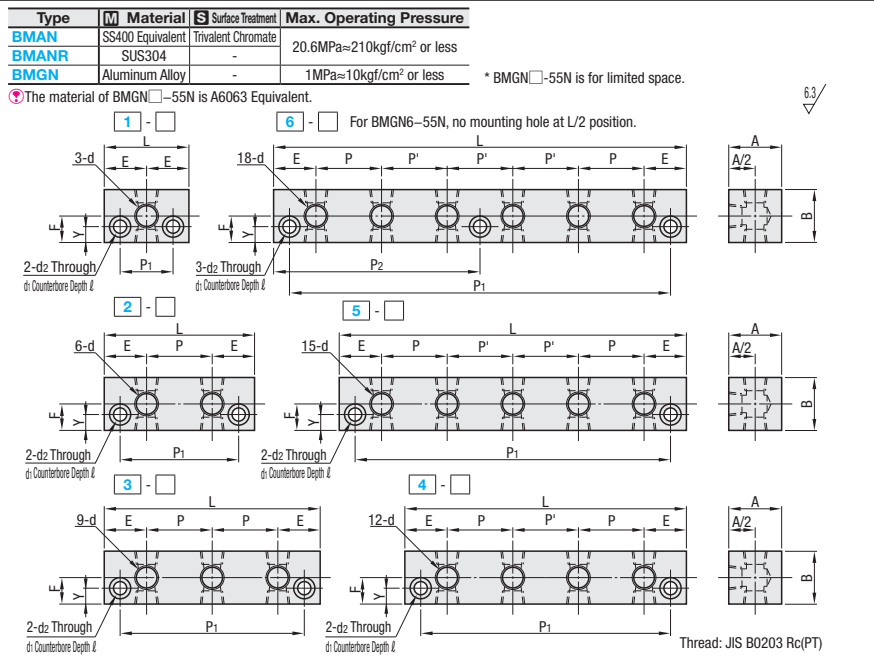

RoHS10

Part Number	Type	No.	d Rc(PT)	A	B	L	P	P'	P ₁	P ₂	E	F	Y	d ₁	d ₂	ℓ	Unit Price		
																	BMAN	BMANR	
BMAN (Oil Hydraulic)	1	11	1/8	40	30	40	-	-	25	-	20	B/2	7	11	6.6	6.5	-	-	
		22	1/4														-	-	
	2	11	1/8		30	80	40	-	-	65	-						20	-	-
		22	1/4															-	-
		33	3/8															-	-
	3	11	1/8		30	120	40	-	-	105	-						20	-	-
		22	1/4															-	-
		33	3/8															-	-
	*4	11	1/8		30	160	40	40	40	145	-						20	-	-
		22	1/4															-	-
		33	3/8															-	-
	*5	11	1/8		30	200	40	40	40	185	-						20	-	-
22		1/4	-	-															
33		3/8	-	-															
*6	11	1/8	30	240	40	40	40	225	120	20	-	-							
	22	1/4									-	-							
	33	3/8									-	-							

* 4, 5 and 6 are available for BMAN only.

Part Number	Type	No.	d Rc(PT)	A	B	L	P	P'	P ₁	P ₂	E	F	Y	d ₁	d ₂	ℓ	Unit Price	
																	BMAN	BMANR
BMGN (Pneumatic)	1	11	1/8	25	25	40	-	-	25	-	20	12.5	7	9.5	5.5	5.5	-	-
		22N	1/4	35	35							17.5						
		55	M5	25	25							12.5						
		55N	M5	15	15							30					20	15
	2	11	1/8	25	25	70	30	-	55	-	20	12.5	7	9.5	5.5	5.5	-	-
		22N	1/4	35	35							17.5						
		55	M5	25	25							12.5						
	3	11	1/8	25	25	100	30	-	85	-	20	12.5	7	9.5	5.5	5.5	-	-
		22N	1/4	35	35							17.5						
		55	M5	25	25							12.5						
	4	11	1/8	25	25	130	30	30	115	-	20	12.5	7	9.5	5.5	5.5	-	-
		22N	1/4	35	35							17.5						
55		M5	25	25	12.5													
5	11	1/8	25	25	160	30	30	145	-	20	12.5	7	9.5	5.5	5.5	-	-	
	22N	1/4	35	35							17.5							
	55	M5	25	25							12.5							
6	11	1/8	25	25	190	30	30	175	95	20	12.5	7	9.5	5.5	5.5	-	-	
	22N	1/4	35	35							17.5							
	55	M5	25	25							12.5							
6	11	1/8	25	25	105	15	15	95	-	15	7.5	3.5	-	4.3	-	-	-	
	22N	1/4	35	35							12.5							
	55N	M5	15	15							105					15	15	95

Ordering Example
 Part Number
 BMAN2-33
 BMGN3-22N