
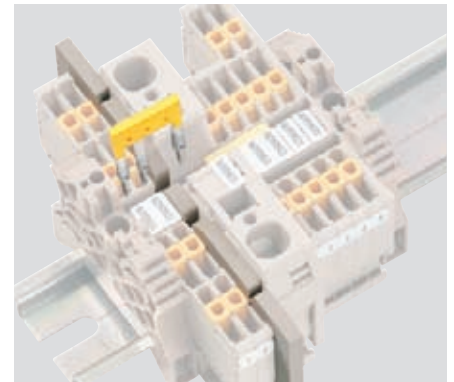
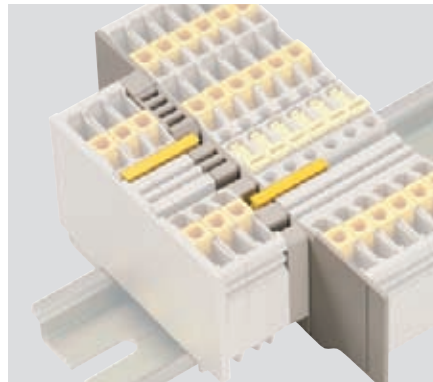


ZEI 16 supply terminal

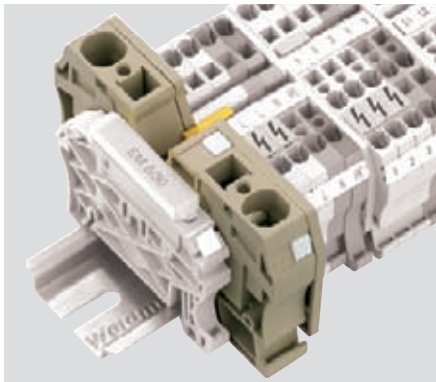

The **ZEI 16** supply terminal is capable of taking conductor cross-sectional areas of up to 25 mm². Standard cross-connections then distribute the current to any number of terminals with a smaller cross-sectional area.

Cross-connection to ITR 1.5N/3AN with QVAR 1 (cross-connection adapter)

Power supply with the IEPL feed plate

Supply options and corresponding cross-connections

		right								
Supply terminals	Output terminals	IDU 1.5N	IDU 1.5N/3AN	IDU 1.5N/4AN	IDU 2.5N	IDU 2.5N/3AN	IDU 2.5N/4AN	ITR 1.5N	ITR 1.5N/3AN	ITR 1.5N/4AN
		left								
ZDU 4		x ¹	x	x	x ¹	x	x	x	x ²	x
ZDU 4 / 3 AN		x ¹	x ¹	x ¹	x ¹	x ¹	x ¹	x ¹	x ²	x ¹
ZDU 4 / 4 AN		x ¹	x ¹	x ¹	x ¹	x ¹	x	x ¹	x ²	x ¹
ZDU 6		x ¹	x	x	x	x	x	x	x ²	x
ZDU 6 / 3 AN		x ¹	x ¹	x ¹	x ¹	x ¹	x ¹	x ¹	x ²	x ¹
ZEI 16		x	x	x	x	x	x	x	x ²	x
left										
Supply terminals	Output terminals	IDU 1.5N	IDU 1.5N/3AN	IDU 1.5N/4AN	IDU 2.5N	IDU 2.5N/3AN	IDU 2.5N/4AN	ITR 1.5N	ITR 1.5N/3AN	ITR 1.5N/4AN
		right								
ZDU 4		x ¹	x ¹	x ¹	x ¹	x ¹	x ¹	x ¹	x ²	x ¹
ZDU 4 / 3 AN		x	x ¹	x ¹	x	x ¹	x ¹	x ¹	x ²	x ¹
ZDU 4 / 4 AN		x	x	x	x	x	x ¹	x	x ²	x
ZDU 6		x	x ¹	x ¹	x	x ¹	x ¹	x ¹	x ²	x ¹
ZDU 6 / 3 AN		x	x ¹	x ¹	x	x ¹	x ¹	x ¹	x ²	x ¹
ZEI 16		x	x ¹	x ¹	x	x ¹	x ¹	x ¹	x ²	x ¹

x¹ with IEPL, x² with QVAR

Ordering data

Type	Colour	Qty.	Order No.
ZEI 16	dark beige	20	1745350000
ZEI 16 BL	blue	20	1766240000
IEPL	dark beige	20	1859570000
QVAR1	dark beige	20	1836370000

Maximum possible current I_{max}

Output terminals	Cross-connection	Supply conductor cross-sectional area	Supply left or right	Supply middle
IDU 1.5N	ZQV 2.5	25 mm ²	62 A	95 A
IDU 2.5N	ZQV 4	25 mm ²	82 A	101 A