


# CP125

# FORM HOLDING CLAMPS



Body	Pull Cylinder	Cam Cylinder
S45C Steel Electroless nickel plated	SCM415 Steel Carburized-hardened Black oxide finish	SCM435 Steel Quenched & tempered Black oxide finish

Note: Jaws must be ordered separately.

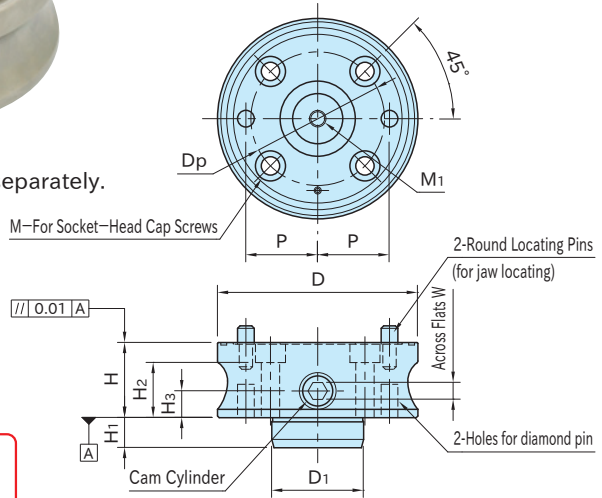

★ **Key Point** —  
Can hold on external/  
internal form.

Part Number	D	H (±0.01)	D <sub>1</sub> (g6)	H <sub>1</sub>	M	H <sub>2</sub>	D <sub>p</sub>	P (±0.02)	W	H <sub>3</sub>	M <sub>1</sub>
CP125-06501	65	35	28	12	M 6	27	42	22	8	12	M 8×1.25
CP125-09001	90	40	42	14	M 8	30	60	30		14	M10×1.5
CP125-12001	120	45	55	18	M10	33	80	43	10	16	
CP125-16001	160	50	63	24	M12	36	110	60		18	

Part Number	Allowable Screw Torque(N·m)	Weight (kg)	Proper Jaws					
			For External Form Holding			For Internal Form Holding		
			Part Number	Clamping Force(kN)	Clamping Stroke	Part Number	Clamping Force(kN)	Clamping Stroke
CP125-06501	15	0.8	CP126-06501	4.5	φ 0.3	CP127-06501	4.5	φ 0.3
CP125-09001	25	1.7	CP126-09001	7		CP127-09001	7	
CP125-12001	40	3.5	CP126-12001	10		CP127-12001	10	
CP125-16001		7.1	CP126-16001	12		CP127-16001		

### Technical Information

- Part locating repeatability: ±0.03
- Jaw locating repeatability: ±0.02

### Notes

Do not actuate clamping without a workpiece to avoid damage and deformation. Tightening with torque greater than the allowable screw torque will lower the durability of the jaw.